


48x40 Rigid Bulk Container, 36 in, Drop Door

Standard

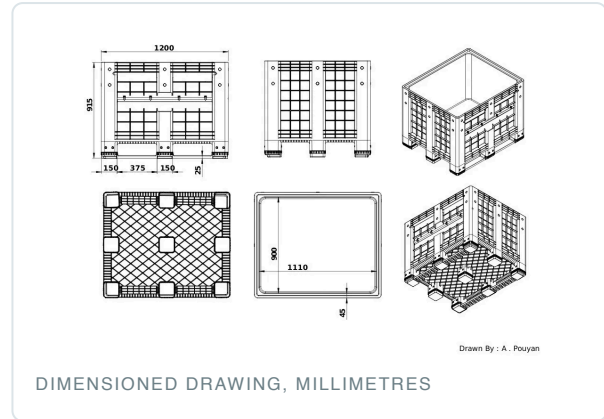

SPECIFICATIONS

Size	47.24 × 39.37 × 36.02 in (1200 × 1000 × 915 mm)
Material	HDPE
Bottom Type	2-Runner or 9-Leg (snap-on)
Net Weight (lb)	100.31 lb (45.5 ± 0.5 kg)
Static Load (lb)	11,023 lb (5,000 kg)
Dynamic Load (lb)	2,205 lb (1,000 kg)
Racking Load (lb)	2,205 lb (1,000 kg)
Load Basis	Ratings assume an evenly distributed load
Temperature Range	−4 to +104 °F (−20 to +40 °C)
Truck Load	104 pcs per jumbo trailer
Dimensional Tolerance	± 5 mm
RFID	Transponder integration available
Container Load (40 HC)	84 pcs
Logo Insert Areas	Centre pillar of the long wall 70 × 80 mm
Branding	Printed or embossed
Colour	Grey, white, navy or blue; other colours on request
Application	Food industry, agriculture, industrial production
Resistance	Water, environmental pollutants, corrosive chemicals
Handling	Forklift, reach truck, hand pallet jack
Automation	Adapts to automatic conveying systems
Construction	Closed walls on an external rib grid, diamond lattice under the base, rounded corners; 850 mm box on 65 mm feet
Inside Dimensions	43.70 × 35.43 × 27.56 in (1110 × 900 × 700 mm)
Wash-Down	Washable and suitable for disinfection
Capacity	185 US gal (700 L)
Food Contact	Food-grade material; certification available on request
Wall Type	Closed walls and base, with a drop door in one long wall
Discharge	Drop door, 370 mm deep from the rim, held by two steel rods

Stacking Load (lb)

11,023 lb (5,000 kg)

Base Openings

375 mm clear on the long side, 275 mm on the short side,
between nine 150 mm feet

Dimensions are published imperial-first with the metric equivalent in brackets. **Specification dimensions are nominal.** The manufacturing drawing reproduced above carries the as-moulded figures, which differ slightly and are subject to the production tolerance stated in the specification. Load ratings are as tested and apply to evenly distributed loads. Contact us for application-specific guidance before specifying for beam racking or automated handling.