


48x40 Rigid Bulk Container, 30 in, 4-Leg, Perforated

Four legs

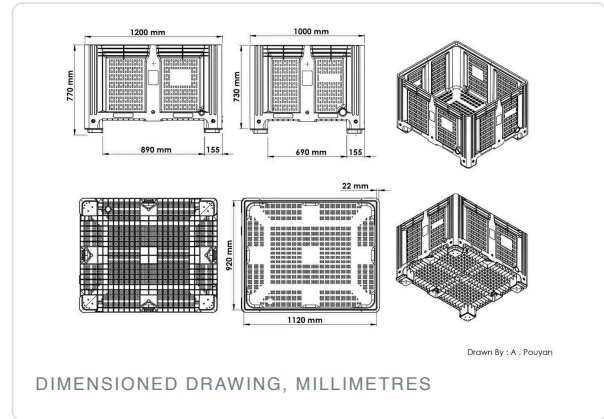

SPECIFICATIONS

Size	47.24 × 39.37 × 30.31 in (1200 × 1000 × 770 mm)
Material	HDPE
Bottom Type	4-Leg (snap-on)
Net Weight (lb)	74.96 lb (34 ± 0.5 kg)
Static Load (lb)	9,921 lb (4,500 kg)
Dynamic Load (lb)	1,102 lb (500 kg)
Load Basis	Ratings assume an evenly distributed load
Racking Load (lb)	1,102 lb (500 kg) on the runner builds
Temperature Range	−4 to +104 °F (−20 to +40 °C)
Truck Load	104 pcs per jumbo trailer
Container Load (40 HC)	84 pcs
Dimensional Tolerance	± 5 mm
Logo Insert Areas	Long side 88 × 128 mm
Branding	Printed or embossed
Colour	Grey, white, navy or blue; other colours on request
Application	Food industry, agriculture, industrial production
Resistance	Water, environmental pollutants, corrosive chemicals
Handling	Forklift, reach truck, hand pallet jack
Automation	Adapts to automatic conveying systems
Construction	Perforated wall and floor panels, square rib lattice under the base, rounded corners; 730 mm box on a 40 mm snap-on base
Inside Dimensions	44.09 × 36.22 × 24.21 in (1120 × 920 × 615 mm)
Capacity	177 US gal (670 L)
Wall Type	Perforated walls and floor
Food Contact	Food-grade material; certification available on request
Stacking Load (lb)	9,921 lb (4,500 kg)
Base Openings	890 mm clear on the long side, 690 mm on the short, between four 155 mm corner feet

Dimensions are published imperial-first with the metric equivalent in brackets. **Specification dimensions are nominal.** The manufacturing drawing reproduced above carries the as-moulded figures, which differ slightly and are subject to the production tolerance stated in the specification. Load ratings are as tested and apply to evenly distributed loads. Contact us for application-specific guidance before specifying for beam racking or automated handling.