


48x40 Food-Grade Pallet, Closed Deck, 3-Runner

Three runners, food-grade HDPE

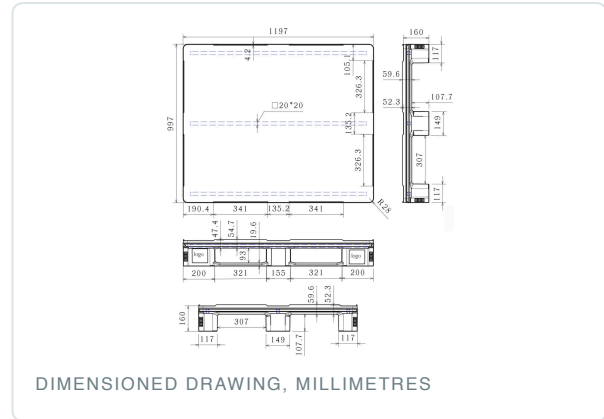

SPECIFICATIONS

Size	47.24 × 39.37 × 6.30 in (1200 × 1000 × 160 mm)
Material	Food-grade HDPE
Deck Type	Closed
Bottom Type	3-Runner
Net Weight (lb)	48.50 lb (22 ± 0.5 kg)
Static Load (lb)	16,535 lb (7,500 kg)
Dynamic Load (lb)	3,307 lb (1,500 kg)
Load Basis	Ratings assume an evenly distributed load
Racking Load (lb)	2,756 lb (1,250 kg)
Temperature Range	−4 to +86 °F (−20 to +30 °C)
Truck Load	520 pcs per jumbo trailer
Fork Entry	4-way
Safety Rims	7 mm
Container Load (40 HC)	450 pcs
Dimensional Tolerance	± 5 mm
RFID	Transponder integration available
Logo Insert Areas	Long side corners 100 × 90 mm · short side corners 100 × 90 mm · centre leg 75 × 85 mm
Branding	Printed or embossed
Colour	Grey, white, navy or blue; other colours on request
Handling	Forklift, hand pallet jack
Reinforcement Profiles	None
Stacking	Stackable
Construction	Welded, fully closed deck with inner round corners at R28
Racking Suitability	Racking load published; the five-runner build is rated for racking systems
As-Moulded Size	1197 × 997 mm in plan, against the nominal 1200 × 1000

Dimensions are published imperial-first with the metric equivalent in brackets. **Specification dimensions are nominal.** The manufacturing drawing reproduced above carries the as-moulded figures, which differ slightly and are subject to the production tolerance stated in the specification. Load ratings are as tested and apply to evenly distributed loads. Contact us for application-specific guidance before specifying for beam racking or automated handling.