


47x31 Nestable Bulk Container, 25 in, 5-Leg

Standard

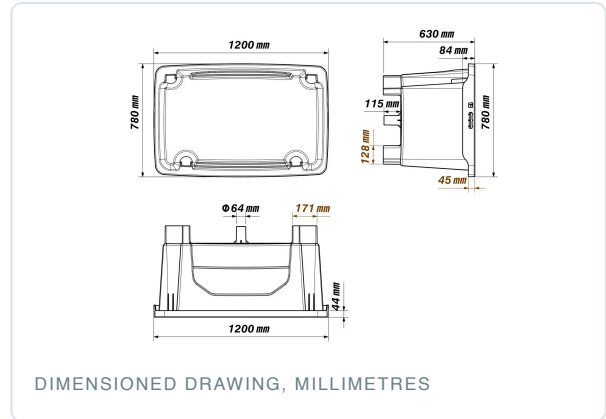

SPECIFICATIONS

Size	47.24 × 30.71 × 24.80 in (1200 × 780 × 630 mm)
Material	HDPE
Bottom Type	5-Leg
Net Weight (lb)	37.48 lb (17 ± 0.5 kg)
Static Load (lb)	1,731 lb (785 kg)
Dynamic Load (lb)	551 lb (250 kg)
Load Basis	Ratings assume an evenly distributed load
Nesting	Nestable, empties drop inside the container below
Temperature Range	−4 to +104 °F (−20 to +40 °C)
Truck Load	510 pcs per jumbo trailer
Container Load (40 HC)	450 pcs
Dimensional Tolerance	± 5 mm
Branding	Printed
Logo Insert Areas	Long side 200 × 80 mm
Colour	Grey, white, navy or blue; other colours on request
Application	Food production, agriculture, industrial manufacturing, construction, municipal services
Resistance	Water, environmental pollutants, corrosive chemicals
Handling	Forklift, reach truck, hand pallet jack
Automation	Adapts to automatic conveying systems
Construction	Solid unperforated walls, rounded corners; four corner legs 171 × 128 mm standing 115 mm clear, plus a 64 mm centre leg
Stacking	Stackable, seated on the rim of the container below
Inside Dimensions	44.29 × 27.17 × 19.88 in (1125 × 690 × 505 mm)
Wash-Down	Washable and suitable for disinfection
Capacity	79 US gal (300 L)
Wall Type	Solid

Dimensions are published imperial-first with the metric equivalent in brackets. **Specification dimensions are nominal.** The manufacturing drawing reproduced above carries the as-moulded figures, which differ slightly and are subject to the production tolerance stated in the specification. Load ratings are as tested and apply to evenly distributed loads. Contact us for application-specific guidance before specifying for beam racking or automated handling.