


47x31 Nestable Pallet, Closed Deck, 3-Runner

Standard

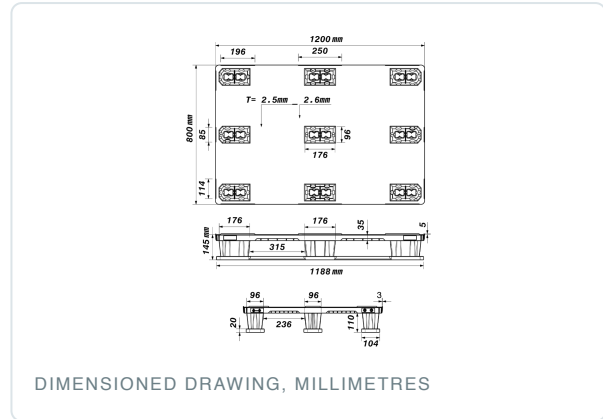

SPECIFICATIONS

Size	47.24 x 31.50 x 5.71 in (1200 x 800 x 145 mm)
Material	HDPE / PP
Deck Type	Closed
Bottom Type	3-Runner, snap-on
Net Weight (lb)	19.84 lb (9 ± 0.5 kg)
Static Load (lb)	5,512 lb (2,500 kg)
Dynamic Load (lb)	2,646 lb (1,200 kg)
Racking Load (lb)	882 lb (400 kg)
Load Basis	Ratings assume an evenly distributed load
Nesting	Nestable, nine legs seat into nine deck cups
Temperature Range	-4 to +104 °F (-20 to +40 °C)
Truck Load	1,820 pcs per jumbo trailer, runners unfitted
Safety Rims	5 mm
Fork Entry	4-way
Container Load (40 HC)	1,410 pcs, runners unfitted
Dimensional Tolerance	± 5 mm
RFID	Transponder integration available
Logo Insert Areas	Long side corners 75 x 25 mm · short side corners 75 x 25 mm
Branding	Embossed
Colour	Grey, white, navy or blue; other colours on request
Handling	Forklift, hand pallet jack
Stacking	Stackable
Construction	One-shot moulded deck, single-faced, with detachable runners
Wall Thickness	2.5 to 2.6 mm
Runner Length	1188 mm, against a 1200 mm deck

Dimensions are published imperial-first with the metric equivalent in brackets. **Specification dimensions are nominal.** The manufacturing drawing reproduced above carries the as-moulded figures, which differ slightly and are subject to the production tolerance stated in the specification. Load ratings are as tested and apply to evenly distributed loads. Contact us for application-specific guidance before specifying for beam racking or automated handling.

