PRODUCT DATASHEET

RC-141

48×40 Rigid Bulk Container, 30 in, 4-Leg

Four legs

PRODUCT VIEW

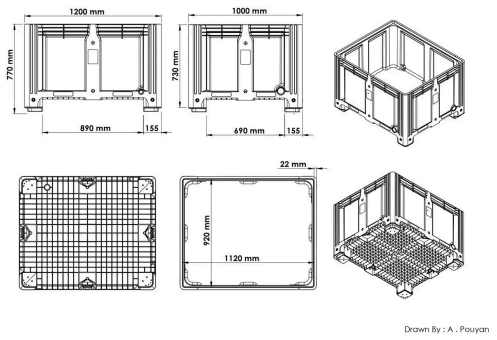

DIMENSIONED DRAWING, MILLIMETRES

SPECIFICATIONS

Size	**47.24 × 39.37 × 30.31 in (1200 × 1000 × 770 mm)**
Material	**HDPE**
Bottom Type	**4-Leg (snap-on)**
Net Weight (lb)	**79.37 lb (36 ± 0.5 kg)**
Static Load (lb)	**9,921 lb (4,500 kg)**
Dynamic Load (lb)	**1,102 lb (500 kg)**
Load Basis	**Ratings assume an evenly distributed load**
Racking Load (lb)	**1,102 lb (500 kg) on the runner builds**
Temperature Range	**–4 to +104 °F (–20 to +40 °C)**
Truck Load	**104 pcs per jumbo trailer**
Container Load (40 HC)	**84 pcs**
Dimensional Tolerance	**± 5 mm**
Logo Insert Areas	**Long side 88 × 128 mm**
Branding	**Printed or embossed**
Colour	**Grey, white, navy or blue; other colours on request**
Application	**Food industry, agriculture, industrial production**
Resistance	**Water, environmental pollutants, corrosive chemicals**
Handling	**Forklift, reach truck, hand pallet jack**
Automation	**Adapts to automatic conveying systems**
Construction	**Smooth closed wall panels, square rib lattice under the base, rounded corners; 730 mm box on a 40 mm snap-on base**
Inside Dimensions	**44.09 × 36.22 × 24.21 in (1120 × 920 × 615 mm)**
Capacity	**177 US gal (670 L)**
Wall Type	**Closed, smooth panels**
Food Contact	**Food-grade material; certification available on request**
Stacking Load (lb)	**9,921 lb (4,500 kg)**
Base Openings	**890 mm clear on the long side, 690 mm on the short, between four 155 mm corner feet**

Dimensions are published imperial-first with the metric equivalent in brackets. **Specification dimensions are nominal.** The manufacturing drawing reproduced above carries the as-moulded figures, which differ slightly and are subject to the production tolerance stated in the specification. Load ratings are as tested and apply to evenly distributed loads. Contact us for application-specific guidance before specifying for beam racking or automated handling.