


48x40 Rackable Pallet, Closed Deck, Reinforced

3-Runner, plain

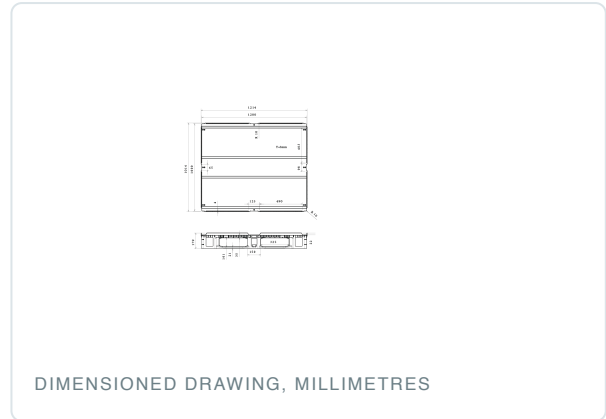

SPECIFICATIONS

Size	47.24 × 39.37 × 6.18 in (1200 × 1000 × 157 mm)
Material	HDPE
Deck Type	Closed
Bottom Type	3-Runner
Net Weight (lb)	34.17 lb (15.5 ± 0.5 kg)
Static Load (lb)	11,023 lb (5,000 kg)
Dynamic Load (lb)	2,646 lb (1,200 kg)
Racking Load (lb)	1,323 lb (600 kg)
Load Basis	Ratings assume an evenly distributed load
Temperature Range	−4 to +104 °F (−20 to +40 °C)
Truck Load	496 pcs per jumbo trailer
Safety Rims	Three heights, 7 to 22 mm
Container Load (40 HC)	364 pcs
Dimensional Tolerance	± 5 mm
Branding	Printed or embossed
Customisation	Made to order, optimised for transport and mechanised systems
Logo Insert Areas	Long side corners 80 × 100 mm · centre leg 65 × 55 mm
Surface Finish	Anti-slip plugs or rubber strips
Colour	All standard colours
Resistance	Humidity, environmental pollutants, chemical acids and corrosives
Handling	Hand pallet truck, forklift, reach truck
Reinforcement Profiles	None

Dimensions are published imperial-first with the metric equivalent in brackets. **Specification dimensions are nominal.** The manufacturing drawing reproduced above carries the as-moulded figures, which differ slightly and are subject to the production tolerance stated in the specification. Load ratings are as tested and apply to evenly distributed loads. Contact us for application-specific guidance before specifying for beam racking or automated handling.